

Chapter 11

Buses and I/O Devices

Arthur B. Maccabe
Department of Computer Science
The University of New Mexico

Copyright 1993–2000, Arthur B. Maccabe and McGraw-Hill, Inc.

Overview

Slide 1

- Synchronous protocols
 - synchronous protocols use a clock
 - asynchronous protocols don't have a clock
 - * typically, faster (no waiting for the clock to strike)
 - * typically more complicated
- Timing considerations
- Arbitration


Slide 2

Bus Signals


Line/signal	Established by
Start	Initiator (Master)
Data	Initiator/responder (Master/slave)
Address	Initiator (Master)
R/W	Initiator (Master)
Done	Responder (Slave)
Clock	Bus

Slide 3

Timing for a Write Transaction

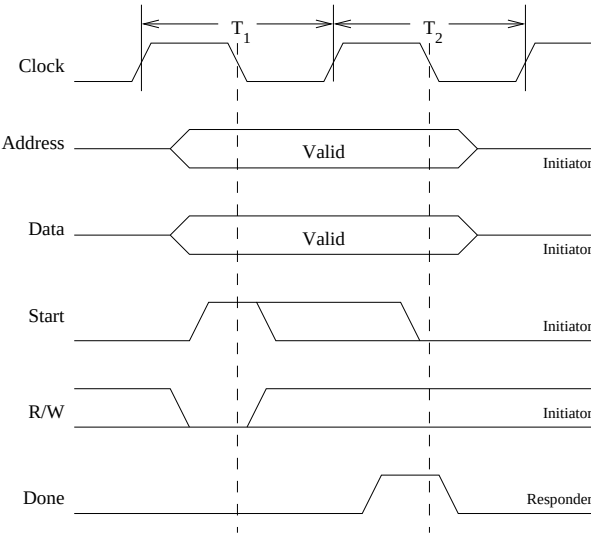


Timing for a Read Transaction

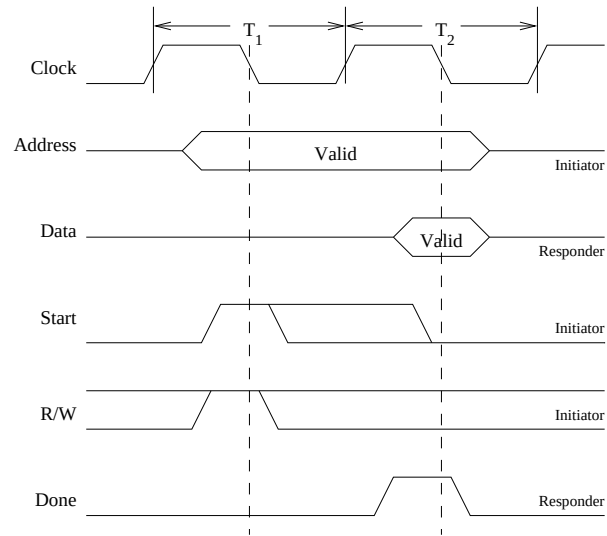

Slide 4

Wait States

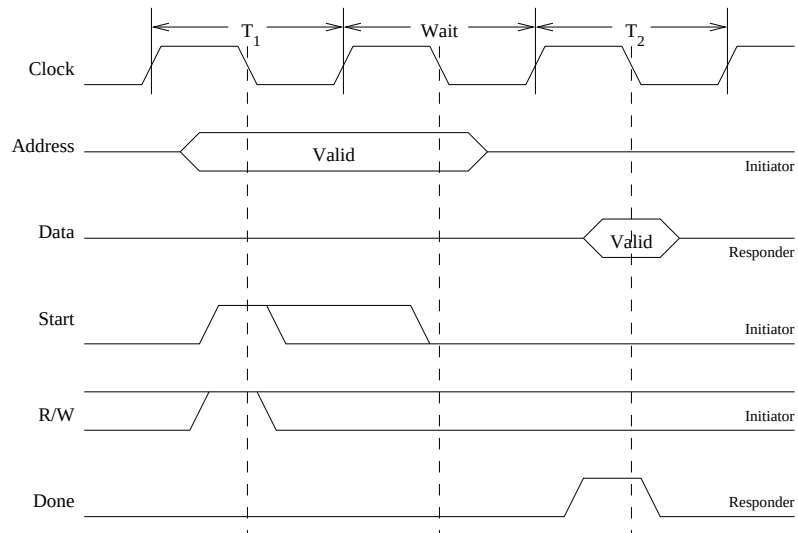

Slide 5

Timing Considerations

1. *Transaction access time*: from when **responder** recognizes **start** signal until **responder** asserts **done** signal
2. *Transaction cycle time*: interval between consecutive requests
3. Calculating wait states


Slide 6

- a access time
- s bus stabilization time
- b bus clock cycle time
- w number of wait states

$$a \leq 1.5 \cdot b + w \cdot b - 3 \cdot s$$

$$w \geq \frac{a - 1.5 \cdot b + 3 \cdot s}{b}$$

Slide 7

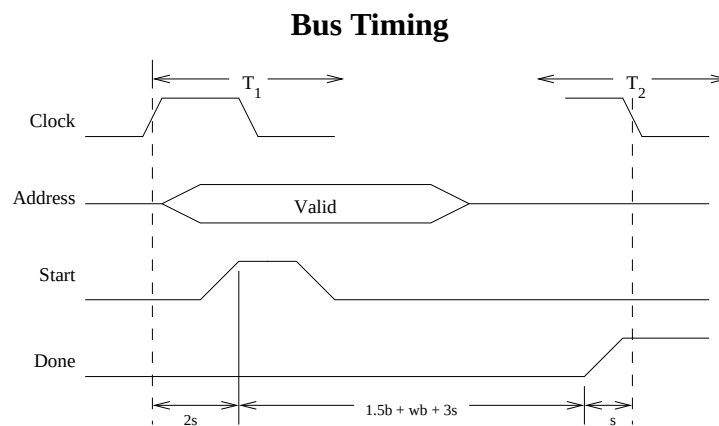

Example 1

- Assumptions
 - bus clock 16.67 MHz
 - bus stabilization time is 10 nanoseconds
 - access time is 80 nanoseconds

Slide 8

- Bus cycle time

$$\frac{1}{16,670,000} \frac{\text{sec}}{\text{cycle}} = \frac{1,000,000,000}{16,670,000} \frac{\text{nanosec}}{\text{cycle}} \approx 60 \frac{\text{nanosec}}{\text{cycle}}$$

- Number of wait states

$$\begin{aligned} w &\geq \frac{80 - 1.5 \cdot 60 + 30}{60} = \frac{20}{60} \\ \Rightarrow w &= 1 \end{aligned}$$

Example 2

- Assumptions
 - bus clock 12.5 MHz (80 nanosecond cycle time)
 - bus stabilization time is 10 nanoseconds
 - access time is 80 nanoseconds

Slide 9

- Number of wait states

$$\begin{aligned} w &\geq \frac{80 - 1.5 \cdot 80 + 30}{80} = \frac{-10}{80} \\ \Rightarrow w &= 0 \end{aligned}$$

The Effect of Cycle Time

- Access time identifies the *minimum* number of wait states
- Assumptions
 - bus stabilization time, 10 nanoseconds
 - 25 MHz clock (40 nanoseconds)
 - access time (read or write) is 20 nanoseconds
 - write cycle time is 160 nanoseconds

Slide 10

$$w \geq \frac{20 - 1.5 \cdot 40 + 30}{40} = \frac{-10}{40}$$

- Cycle time
 - could be as low as 80 nanoseconds (two bus cycles)
 - needs to be 160 nanoseconds, when to add wait states?